




CONVERTING MADE EASY

ETV330/515

High Speed Sheeter

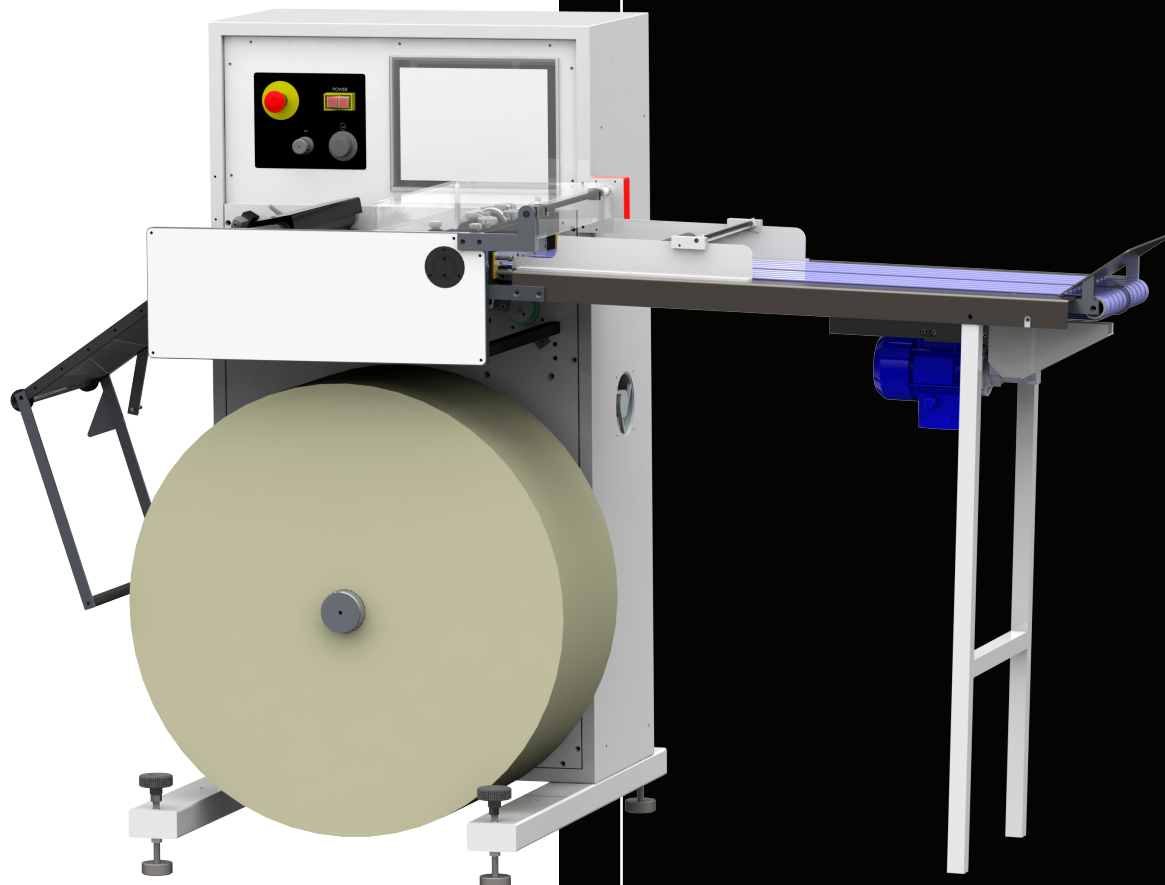

Grafisk Maskinfabrik A/S

Bregnerødvej 92, 3460 Birkerød, Denmark

Phone +45 4581 2300

Email gm@gm.dk

Web www.gm.dk

SPECIFICATIONS

METRIC

IMPERIAL

Max. web width	330 or 515 mm	13 or 20.3"
Min. web width	30 mm	1.18"
Max. sheet length	10 m	33 ft
Min. sheet length	10 mm	0.4"
Max. web speed	30 m/min	98 ft/min
Core diameter	76,2 or 152,4 mm	3 or 6"
Max. unwind diam. (internal)	Ø800 mm	31.5"
Cutting accuracy approx.	± 0,15 mm	± 0.006"
Max. roll weight, unwinding	150 kg	331 lb

POWER / AIR

Power / Air	200 – 240V+N+PE, 13A, 6 bar	
Dimensions ETV330 (WxDxH):	2,1x0,95x1.5 m	6.9x2.95x4.95 ft
Dimensions ETV515 (WxDxH):	2,1x1,13x1.5 m	6.9x3.71x4.95 ft

Roll to sheet guillotine cutter suitable for cutting labels and heavy materials. In-line and off-line operation. Built-in register control. A touch screen that allows for easy handling operates the sheeter. Cutting according to length, number of labels or print marks. It features a conveyor belt with stack and total counter. The web speed is limited to max. 30 m/minute and max. 14.000 sheets/hour and varies consequently according to the selected cutting length. The speed is typically 3.000 - 10.000 sheets/hour, subject to the job.

"Converting made easy"

Specifications and terms are subject to change without notice. Grafisk Maskinfabrik is a registered trademark. All other product and brand names are trademarks and/or registered trademarks of their respective companies. GM disclaims any and all rights in these marks. Copyright 2017, Grafisk Maskinfabrik A/S For more information, please visit www.gm.dk

ETV-Series Sheeters




The sheeter is operated by a touch display and available for web widths of 330 mm (~13.0") or 515 mm (~20.3"). The sheeting is done by a guillotine cutter which is also suitable for cutting heavy materials. The sheeter easily adjusts to cutting by label gaps, length or print marks with a resolution of 0,1 mm (~0.004") and an approximate accuracy of +/- < 0,15 mm. The machine can be supplied with rotating length slitting.

Features

- Touch display for setting number of labels per sheet and other job information.
- Unwind air expanding shaft with separate motor.
- Conveyor belt with setting of sheets per stack and total number of sheets.
- Automatic register control adjusts for changes in the web speed.
- When the sheeter is switched off, all settings are preserved (battery backup).
- Inline operation possible with extra sensor (optional equipment).
- Conveyor with job separation.

Options

- Print mark reader for cutting by print marks.
- Capacitive sensor ("clear on clear").
- Length slitting knives (rotary top and bottom cutter), max. 6 knives.
(can be retrofitted.)
- Separate unwind section, max. roll diameter 1000 mm (~39.4").

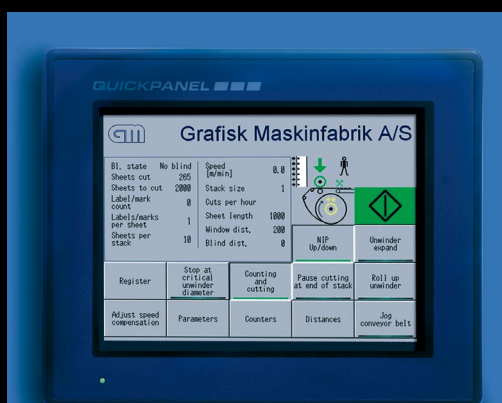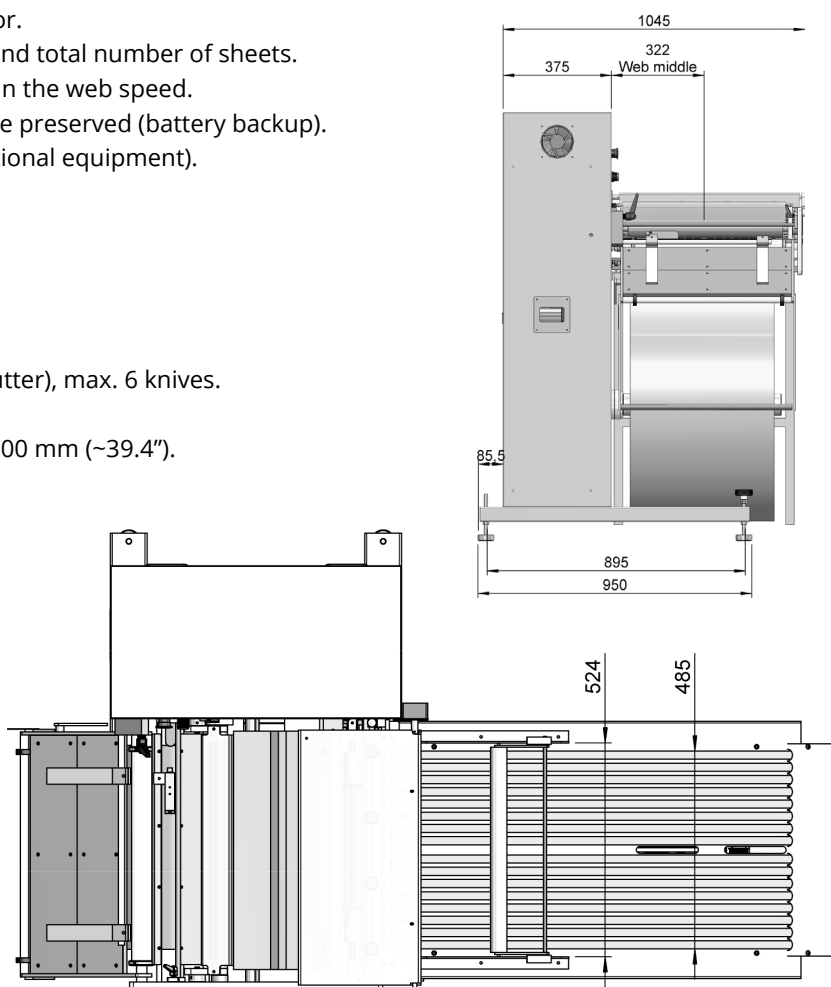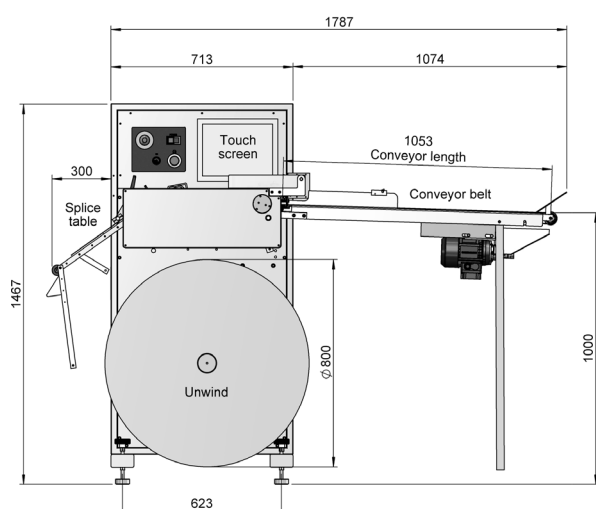

Easy to use touch-screen.



Rotating length slitting.